

Rec'd PCT/PTC 05 OCT 2004

PCT/NL

0 0 0 2 0 3



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 09 APR 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02076313.2

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

24/03/03

EPA/EPO/OEB Form

Best Available Copy

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 02076313.2

Anmeldetag:
Date of filing: 05/04/02
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
DSM N. V.
6411 TE Heerlen
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Thermoplastic compositions comprising aromatic polycarbonates and/or polyesters having improved mould release behaviour

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification Internationale des brevets:
C08K5/103, C08L69/00, C08L67/00

Am Anmeldetag benannte Vertragstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:
Remarks:
Remarques:

THERMOPLASTIC COMPOSITION COMPRISING AN AROMATIC
POLYCARBONATE AND/OR A POLYESTER WITH IMPROVED MOULD RELEASE
BEHAVIOUR

5

The invention relates to a thermoplastic composition comprising (a) an aromatic polycarbonate and/or a polyester, and (b) an effective amount of a mould release agent. The invention further concerns the use of the thermoplastic composition according to the invention for injection moulding of articles and to moulded articles thus obtained.

10

Such a thermoplastic composition is known from US 4626566. In this patent publication a composition is disclosed that comprises an aromatic polycarbonate in an admixture with a mould release effective amount of a hydrogenated alpha-olefin oligomer fluid, preferably about 0.01-1 mass%. This composition is described to show better mould release behaviour than conventional agents, like pentaerythritol tetrastearate; that is lower ejection forces suffice to remove a moulded part from the opened mould of an injection moulding machine.

15

Effective mould release behaviour is a key property for a thermoplastic composition to enable efficient and economic processing into formed articles via injection moulding. Normally a mould release agent (MRA) needs to be added to a composition to enable such processing behaviour. In order to function effectively as a MRA, such agent or compound must be stable at the processing conditions so that it will not lose its effectiveness and/or cause discoloration, and must not chemically interact with the polymers and other components of the composition, or otherwise adversely affect the composition. In case of transparent or translucent polymers, the MRA should not deteriorate transparency. During injection moulding, the MRA should not form deposits on the surface of the mould, nor should it after moulding migrate to the surface of the part to such extent that it becomes visible on the surface, often called blooming. Identification of inert yet more effective release agents remains therefore a continuous subject of attention.

20

25

30

A disadvantage of the known thermoplastic composition described in US 4626566 is, that it does not show problem-free mould release behaviour in every type of mould, especially not in moulds for relatively large parts or for parts with walls having little draft, causing irregular processing or high release forces, possibly resulting in distortion of an ejected part. Another disadvantage is that during demoulding of parts

35

a squeaking noise is made.

It is therefore an object of the present invention to provide a thermoplastic composition that shows a more regular and silent processing behaviour, with lower release forces during demoulding of parts.

5 This object is achieved according to the invention with a thermoplastic composition wherein the mould release agent contains
(b1) a fatty acid ester of an aliphatic polyol having 2-6 hydroxy groups and an aliphatic C_{10} - C_{36} carboxylic acid; and
(b2) a saturated alpha-olefin oligomer of at least one C_6 - C_{18} alpha-olefin.

10 With the thermoplastic composition according to the invention a very regular injection moulding processing is possible, with lower release forces needed during demoulding of parts, and with virtually no additional sounds. A further advantage is that the total moulding cycle-time for a given part can be reduced, contributing to a more economic process. Furthermore, no slip-stick effects are observed during
15 demoulding, leading to very smooth surfaces of moulded parts.

It is rather surprising to find that these specific release agents form a synergetic combination showing such advantageous properties, since use of both agents per se is known, even from one publication: in US 4626566 pentaerythritol tetrastearate is used in comparative experiments.

20 It is true that in US 4626566 a general remark is made that the alpha-olefin oligomer fluid can be blended with other lubricants such as the synthetic and naturally occurring polyol esters, but such a combination is not specifically disclosed, nor is it suggested that such combination would show any synergetic effect as described in the present invention.

25 The thermoplastic composition according to the invention comprises an aromatic polycarbonate and/or a polyester. In principle, any known aromatic polycarbonate may be used. Suitable aromatic polycarbonates in this composition are polycarbonates made from at least one dihydric phenol and a carbonate precursor, for example by using an interfacial polymerisation process.

30 Suitable dihydric phenols that may be applied are compounds with one or more aromatic rings containing two hydroxyl groups, each directly attached to a carbon atom of an aromatic ring. Examples of such compounds include
4,4'-dihydroxybiphenyl, 2,2-bis(4-hydroxyphenyl)propane (bisphenol-A),
2,2-bis(4-hydroxy-3-methylphenyl)propane,
35 2,2-bis-(3-chloro-4-hydroxyphenyl)-propane,
2,2-bis-(3,5-dimethyl-4-hydroxyphenyl)-propane,

- 2,4-bis-(4-hydroxyphenyl)-2-methylbutane,
2,4-bis-(3,5-dimethyl-4-hydroxyphenyl)-2-methylbutane,
4,4-bis(4-hydroxyphenyl)heptane, bis-(3,5-dimethyl-4-hydroxyphenyl)-methane,
1,1-bis-(4-hydroxyphenyl)-cyclohexane,
5 1,1-bis-(3,5-dimethyl-4-hydroxyphenyl)-cyclohexane,
2,2-(3,5,3',5'-tetrachloro-4,4'-dihydroxybiphenyl)propane,
2,2-(3,5,3',5'-tetrabromo-4,4'-dihydroxybiphenyl)propane,
(3,3'-dichloro-4,4'-dihydroxyphenyl)methane,
bis-(3,5-dimethyl-4-hydroxyphenyl)-sulfone, bis-4-hydroxyphenylsulfone,
10 bis-4-hydroxyphenylsulfide.

The carbonate precursor can be a carbonyl halogenide, a halogen formate or a carbonate ester. Examples of carbonyl halogenides include carbonyl chloride and carbonyl bromide. Examples of suitable halogen formates are bis-halogen formates of dihydric phenols like hydroquinone or of glycols like ethylene glycol.

- 15 Examples of suitable carbonate esters include biphenyl carbonate, di(chlorophenyl)carbonate, di(bromophenyl)carbonate, di(alkylphenyl)carbonate, phenyltolyl carbonate and mixtures thereof. Although other carbonate precursors may be used as well, carbonylhalogenides and especially carbonylchloride, better known as phosgene, are preferred.

- 20 The aromatic polycarbonates in the composition according to the invention may be produced from said compounds with known methods of preparation. In general, also a catalyst, an acid acceptor, and a compound for controlling the molar mass of the polycarbonate are used.

- 25 Examples of a catalyst that may be used include tertiary amines like triethyl amine, tripropyl amine and N,N-dimethyl aniline, quaternary ammonium compounds like tetraethylammonium bromide or quaternary phosphonium compounds such as methyltriphenyl phosphoniumbromide.

- 30 Examples of suitable acid acceptors include organic compounds like pyridine, triethyl amine, dimethyl aniline. Examples of inorganic acid acceptors are hydroxides, carbonates, bicarbonates and phosphates of an alkali- or earthalkali metal. Examples of compounds that can be used for controlling the molecular mass include monohydric phenols like phenol, p-alkylphenols, para-bromophenol and secondary amines.

- 35 Within the definition of polycarbonate are also copolycarbonates made from at least two dihydric phenols and copolyester-carbonates, that are copolymers made from a dihydric phenol, a dicarboxylic acid and a carbonate

precursor.

Such aromatic polycarbonates, and their preparation and properties have been extensively described in for example Encycl. Polym. Sci. Eng., 11, p. 648-718 (Wiley, New York, 1988); or in Kunststoff Handbuch, 3/1, p. 117-297 (Hanser
5 Verlag, Muenchen, 1992).

In a special embodiment,, the composition according to the invention contains a polycarbonate made from bisphenol-A and phosgene, and optionally minor amounts of other compounds with one, two, or more reactive groups, the latter compounds as comonomers, for example to affect the melt viscosity of the polymer.
10 Such polymers, often referred to as bisphenol-A polycarbonate, or even simply polycarbonate (PC), are commercially available and are advantageously used as a construction material.

The thermoplastic composition according to the invention may also comprise a polyester. In principle, all current thermoplastic polyesters and copolyesters
15 can be used as the thermoplastic polyester in the composition according to the invention.

Examples of such polyesters include essentially linear polyesters made via a condensation reaction of at least one dicarboxylic acid (diacid), or an ester-forming derivative thereof, and at least one dihydric alcohol (diol). The diacid and diol
20 may both be either aliphatic or aromatic, but especially aromatic and partly aromatic polyesters are of interest as thermoplastic moulding materials in view of their high softening points and hydrolytic stability. Aromatic polyesters, also referred to as polyarylates, have essentially all ester linkages attached to aromatic rings. They may be semi-crystalline and even show liquid crystalline behaviour, or amorphous.

25 Partly aromatic polyesters, obtained from at least one aromatic dicarboxylic acid (diacid), or an ester-forming derivative thereof, and at least one aliphatic diol are the preferred polyesters for the present invention. Examples of suitable aromatic dicarboxylic acids include terephthalic acid, 1,4-naphthalenedicarboxylic acid, or 4,4'-biphenyldicarboxylic acid. Suitable aliphatic diols
30 are alkylene diols, especially those containing 2-6 C-atoms, preferably 2-4 C-atoms. Examples thereof include ethylene glycol, propylene diols and butylene diols. Preferably ethylene glycol, 1,3-propylene diol or 1,4-butylene diol are used, more preferably 1,4-butylene diol. Suitable partly aromatic polyesters are polyalkylene terephthalates, for example polyethylene terephthalate (PET), polypropylene
35 terephthalate (PPT), or polybutylene terephthalate (PBT); polyalkylene naphthalates, for example polyethylene naphthalate (PEN), polybutylene naphthalate (PBN);

polyalkylene dibenzoates, for example polyethylene bibenzoate; and blends or copolyesters hereof. Preferably, PET, PBT, PEN and PBN are used, more preferably PBT and PET, because of their commercial availability and advantageous combination of processing and performance properties.

5 Such partly aromatic polyesters may optionally also contain a minor amount of units derived from other dicarboxylic acids, for example isophthalic acid, or other diols like cyclohexanedimethanol, which generally lowers the melting point of the polyester. The amount of other diacids or diols is preferably limited, unless it is desired to reduce the semi-crystalline character of the polyester.

10 A special group of partly aromatic polyesters are so-called segmented or block copolyesters which, in addition to polyester segments from the above group of partly aromatic polyesters, called hard segments, also contain so-called soft segments. Such soft segments are derived from a flexible polymer; that is a substantially amorphous polymer with a low glass-transition temperature (T_g) and low stiffness,
15 having reactive end-groups, preferably two hydroxyl groups. Preferably the T_g is below 0 °C, more preferably below -20, and most preferably below -40 °C. In principle various different polymers can be used as soft segment, suitable examples are aliphatic polyethers, aliphatic polyesters, or aliphatic polycarbonates. The molar mass of the soft segments may vary within a wide range, but is preferably chosen between
20 400 and 6000 g/mol. These block copolyesters, especially polyether esters, are useful as thermoplastic elastomers.

 Above mentioned thermoplastic polyesters, their preparation and properties are extensively described in for example "Encyclopedia of Polymer Science and Engineering", Vol. 12, p.1-75 and p217-256; John Wiley & Sons (1988), and in
25 "Ullmann's Encyclopedia of Industrial Chemistry", Vol. A21, p.227-251; VCH Publishers Inc (1992); and in the references mentioned therein.

 The thermoplastic composition according to the invention may also comprise a blend of aromatic polycarbonate and polyester. In such blend both the polycarbonate and the polyester can be the major component; that is form a continuous
30 phase or matrix. The ration between the polycarbonate and the polyester may vary between wide limits, e.g. from 1/9 to 9/1. The advantage of these blends is that an optimum combination of properties may be obtained. Preferably, the composition comprises a blend of bisphenol-A polycarbonate and polybutylene terephthalate.

 The composition according to the invention comprises an effective
35 amount of (b1) a fatty acid ester of an aliphatic polyol having 2-6 hydroxy groups and an aliphatic C₁₀-C₃₆ carboxylic acid, and (b2) a saturated alpha-olefin oligomer of at

least one C_6 - C_{18} alpha-olefin as mould release agent. An effective amount is understood to be any amount that reduces the force needed to eject an article from a mould and to obtain an article without distinct surface defects or distortions, as compared to a situation wherein no MRA is used.

5 The composition according to the invention contains at least one fatty acid ester of an aliphatic polyol having 2-6 hydroxy groups and an aliphatic C_{10} - C_{36} carboxylic acid as component (b1). Such compounds are well known, as are methods for their preparation. These compounds are monomeric polyesters made by reacting a polyol and a fatty acid. All or only part of the hydroxyl groups in the polyol may be
10 esterified, depending on the molar ratio of fatty acid to hydroxyl groups. Preferably, the composition contains a fatty acid ester that has still some hydroxyl-functionality, since these compounds are found to be more effective.

 Both the aliphatic polyol and aliphatic carboxylic acid may be linear or branched. Preferably, the polyol and the carboxylic acid are fully saturated, because
15 such compounds show better thermal stability.

 Examples of suitable aliphatic polyols (polyhydric alcohols) having 2-6 hydroxy groups include alkylene glycols, like ethylene glycol, propylene glycol, neopentyl glycol; polyglycols like diethylene glycol; glycerol, trimethylolethane, trimethylolpropane, ditrimethylolpropane, pentaerythritol, sorbitol, or mannitol. Mixtures
20 of these compounds may also be used.

 Preferably, the polyol in component (b1) has 3-4 hydroxy groups. Examples thereof include glycerol, trimethylolethane, trimethylolpropane, ditrimethylolpropane, and pentaerythritol. Compounds (b1) derived herefrom show good compatibility with the polymer in the composition.

25 Examples of suitable aliphatic C_{10} - C_{36} carboxylic acid include capric acid, lauric acid, palmitic acid, stearic acid, behenic acid and montanic acid. Mixtures of these compounds may also be used.

 Preferably, the carboxylic acid contains 12-30; more preferably 14-28 carbon atoms. Most preferably the carboxylic acid in component (b1) is a C_{16} - C_{22} fatty
30 acid, because then an optimum balance is reached between compatibility of the fatty acid ester with the polymer and component (b2) in the composition and release performance. Very good results are obtained with esters of stearic acids, for example with compositions comprising glycerol monostearate, glycerol tristearate, and especially pentaerythritol tetrastearate as component (b1). Such compounds are
35 commercially available from various sources.

 The composition according to the invention contains at least one

saturated alpha-olefin oligomer of at least one C_6 - C_{18} alpha-olefin as component (b2).

Such compounds and their preparation are known in the art. The compounds can for example be made by catalytic oligomerisation of an alpha-olefin, followed by

hydrogenation to remove unsaturation. Such compounds are of oily or waxy nature,

5 and show good fluidity over a wide temperature range. The compound is generally a mixture of oligomers of different degrees of polymerisation, branching and

isomerisation, depending on their preparation. Suitable products generally have a

molar mass (meant is number averaged molar mass, M_n , unless indicated otherwise)

from about 250 up to several thousands. In view of their viscosity, alpha-olefin

10 oligomers with a molar mass below about 1000 g/mol are preferred, more preferably

the molar mass is about 400-800 g/mol, most preferably the molar mass is about 450-

650 g/mol. This provides a better balance of material handling and release behaviour of the thermoplastic composition.

The saturated alpha-olefin oligomer may be derived from a number of

15 different alpha-olefins of mixtures thereof, but preferably component (b2) is an oligomer of a C_8 - C_{12} poly-alpha-olefin, in order to optimise compatibility and release behaviour.

Excellent results are obtained with a composition comprising as component (b2)

oligomers of a C_{10} poly-alpha-olefin, which products are also readily available. Such

compounds are for example commercially available from BP Chemicals under the trade

20 name Durasyn®.

The ratio between the two components (b1) and (b2) in the thermoplastic composition according to the invention can in principle vary between wide limits to show improved mould release behaviour. Preferably, the mass ratio of components (b1) and (b2) is from 1/9 to 9/1, to markedly reduce slip-stick effects.

25 Lower ejection forces are especially obtained, when the mass ratio of components (b1) and (b2) is from 1/6 to 6/1, more preferably from 1/3 to 3/1, even more preferably 2/3 to 3/2. Very good overall processing and demoulding behaviour was found for compositions wherein the mass ratio of components (b1) and (b2) is about 1/1.

The composition according to the invention comprises an effective

30 amount of the above described components as mould release agent. Generally, an amount of from about 0.01 mass% is needed to have any effect. Using more than

about 3 mass% adds in general little to release performance, but may have negative effects on other properties or processing behaviour. Preferably, the amount of mould

release agent (b) is about 0.05-2 mass%, more preferably 0,1 — 1 mass%, even more

35 preferably 0,25-0,75 and still more preferably about 0,4 — 0,6 mass% to optimise processing and demoulding behaviour.

A thermoplastic composition comprising bisphenol-A polycarbonate as (a) and 0.4 – 0.6 mass% of a 2/3 to 3/2 mixture of pentaerythritol tetrastearate and a C₁₀ alpha-olefin oligomer as (b) shows remarkably good processing and mould release behaviour even when being processed into large complicated products.

5 An additional advantage of the MRA system according to the invention is that it does not deteriorate optical transparency of a polycarbonate composition.

10 The thermoplastic composition according to the invention may further comprise any customary additives, like heat- and UV-stabilisers, anti-oxidants, other processing aids, nucleating agents, colorants, impact-modifiers, filler materials and reinforcing agents, flame retarding compounds and anti-dripping agents.

15 The invention also relates to the use of the thermoplastic composition according to the invention for injection moulding of articles, since these novel compositions show advantageous properties during injection moulding operation; that is a very stable operation, easy mould release without slip-stick effects, and shorter overall moulding cycles.

20 The invention further concerns moulded articles made from the thermoplastic composition according to the invention, especially via an injection moulding process. Such moulded articles can be made with less surface defects originating from demoulding operation, like streakes or scratches, and can be produced with shorter moulding cycle-time, thus at lower cost.

 The invention will now be further illustrated with the following examples and comparative experiments.

Materials

25	Following materials were used:	
PC	a bisphenol-A polycarbonate with Limiting Viscosity Number of 46 ml/g (as determined on a solution in dichloromethane at 25°C; ISO 16828/4); available as Xantar® 19 R (DSM Engineering Plastics, NL);	
PETS	pentaerythritol tetrastearate (actual degree of esterification about 88 %); available as Loxiol® EP 861 (Cognis, DE);	
30	GMS	glycerol monostearate; available as Loxiol® EP12 (Cognis, DE);
	PAO1	saturated alpha-olefin oligomer of 1-decene, M _n about 450 g/mol; Durasyn 164 (BPChemicals, BE);
	PAO2	saturated alpha-olefin oligomer of 1-decene, M _n about 570 g/mol;
35		Durasyn 166 (BPChemicals, BE);

Injection moulding

Mould release performance of different compositions was evaluated during injection moulding of a cylindrical beaker (of diameter 60 mm, height 70 mm and wall thickness of 1.8 mm) with a demoulding angle of 0° on an Engel 80 machine.

- 5 Temperature settings of the cylinder were 280-290 °C (from hopper to nozzle), resulting in a melt temperature of 305°C and the mould was kept at a constant temperature of 80 °C. The mould was equipped with ejector pins, of which one was connected to a Kistler type 9021A force transducer. After initially discarding about 25 shots, demoulding forces were automatically registered and monitored during moulding
- 10 of at least 75 subsequent shots. From shot numbers 1, 30 and 75 a detailed force registration with time was made. The average release force is calculated as the average value of the maximum in the demoulding force registered during 75 shots.

Comparative experiment A.

- 15 A composition comprising PC, 0.3 mass% of PETS, and 0.2 mass% of GMS was made by melt mixing the components on a ZSK25 twin screw extruder, and drying the obtained granules.

- Mould release performance was evaluated as indicated above; the results are summarized in Table 1. In Figure 1 the detailed force registration is presented for shot number 75. Shown is the release force (as measured with the Kistler element) as a function of time.
- 20

Comparative experiments B and C.

- Similar to comparative experiment A, compositions were made and tested; except that in B the composition contains 0.6 mass% of PAO1 as MRA; and in C 0.6 mass% of PAO2 is used. Results are given in Table 1. In Figure 2 the detailed
- 25 force registration for shot number 75 of Comp exp. B is presented. The oscillation in the registered force represents the slip-stick behaviour also observed visually: the part is not ejected in a smooth single movement. Visually examining the surface of the part also reveals a wave-like pattern.

Example 1

30

Analogous to the other experiments, a composition was made with the following combination as MRA: 0.15 mass% of PETS, 0.1 mass% of GMS and 0.3 mass% of PAO1.

- 35 The results are presented in Table 1 and Figure 3 (representing the detailed force registration for shot number 75). Note the very smooth curve and the low

maximum force value. The surface quality of moulded parts was found to be excellent.

Example 2

5 For testing on semi-industrial scale a composition comprising PC, 0.3 mass% of PETS and 0.3 mass% of PAO2 was made by melt mixing the components on a ZSK70 twin screw extruder, and drying the obtained granules.

The composition was processed into a tray-like part of approximately 57*57*8 cm, with walls showing very little draft, using an Engel 3002 (800 tons) injection moulding machine at standard temperature settings. The part had a mass of
10 about 2.2 kg. Processing appeared to be very smooth and stable, and no demoulding problems were encountered. By further optimising processing settings, the total cycle-time per shot could be reduced from 100 s to 80 s (i.e. a reduction of about 20%). The moulded part had excellent transparency and was virtually free from surface defects.

Comparative experiments D and E

15 Analogous to Example 2 compositions containing 0.6 mass% of PAO2 and PETS, respectively, were made and subsequently processed into the same part. In both cases release problems and irregular processing were encountered. During demoulding of a part made from composition D, a squeaking sound was made. Stable processing appeared only possible, when total cycle-time was significantly
20 increased.

Table 1

	<i>MRA</i>	<i>Average release force (N)</i>	<i>observations</i>
Comp. Exp. A	0.3 PETS 0.2 GMS	1300	Constant release force; No slip-stick effect
Comp. Exp. B	0.6 PAO1	2100	Increasing from 2000 to 2100 N; Slip-stick effect
Comp. Exp. C	0.6 PAO2	1750	Increasing from 1600 to 1900 N; Slip-stick effect
Example 1	0.15 PETS 0.1 GMS 0.3 PAO1	1000	Constant release force; no slip-stick effect
Example 2	0.3 PETS 0.3 PAO2	n.d.	Problem-free processing; Excellent surface quality
Comp. Exp. D	0.6 PAO2	n.d.	Troublesome demoulding; squeaking
Comp. Exp. E	0.6 PETS	n.d.	Troublesome demoulding; irregular

From these experiments it can be concluded that a thermoplastic composition comprising polycarbonate and a MRA containing both a fatty acid ester and a saturated alpha-olefin oligomer, shows significantly better demoulding behaviour during injection moulding than compositions containing only one of said compounds: a very stable moulding process, no slip-stick behaviour, no unpleasant squeaking noises, and lower release forces during ejection of a part. At similar concentration, the present MRA according to the invention shows a synergetic effect over each of its components. The obtained moulded parts also showed better surface quality, due to the absence of demoulding-related surface defects.

CLAIMS

1. Thermoplastic composition comprising (a) an aromatic polycarbonate and/or a polyester, and (b) an effective amount of a mould release agent, characterised
5 in that the mould release agent contains
 - (b1) a fatty acid ester of an aliphatic polyol having 2-6 hydroxy groups and an aliphatic C₁₀-C₃₆ carboxylic acid; and
 - (b2) a saturated alpha-olefin oligomer of at least one C₆-C₁₈ alpha-olefin.
2. Thermoplastic composition according to claim 1, wherein (a) is bisphenol A
10 polycarbonate.
3. Thermoplastic composition according to any one of claims 1-2, wherein the polyol in component (b1) has 3-4 hydroxy groups.
4. Thermoplastic composition according to any one of claims 1-3, wherein the carboxylic acid in component (b1) is a C₁₆-C₂₂ fatty acid.
- 15 5. Thermoplastic composition according to any one of claims 1-4, wherein component (b1) comprises pentaerythritol tetrastearate.
6. Thermoplastic composition according to any one of claims 1-5, wherein component (b2) has a molar mass of about 400-800 g/mol.
7. Thermoplastic composition according to any one of claims 1-6, wherein
20 component (b2) is an oligomer of a C₈-C₁₂ poly-alpha-olefin.
8. Thermoplastic composition according to any one of claims 1-7, wherein component (b2) is an oligomer of a C₁₀ poly-alpha-olefin.
9. Thermoplastic composition according to any one of claims 1-8, wherein the mass ratio of components (b1) and (b2) is from 1/6 to 6/1.
- 25 10. Thermoplastic composition according to any one of claims 1-9, wherein the amount of mould release agent (b) is about 0.25-0.75 mass%.
11. Use of the thermoplastic composition according to any one of claims 1-10 for injection moulding of articles.
12. Moulded articles made from the thermoplastic composition according to any
30 one of claims 1-10.

ABSTRACT

5 The invention relates to a thermoplastic composition comprising (a) an aromatic polycarbonate and/or a polyester, and (b) an effective amount of a mould release agent containing (b1) a fatty acid ester of an aliphatic polyol having 2-6 hydroxy groups and an aliphatic C₁₀-C₃₆ carboxylic acid; and (b2) a saturated alpha-olefin oligomer of at least one C₆-C₁₈ alpha-olefin. With this thermoplastic composition a very regular injection moulding processing is possible, with lower release forces needed during demoulding of parts, and with shorter total moulding cycle-times.

10 The invention further concerns the use of the thermoplastic composition according to the invention for injection moulding of articles and to moulded articles thus obtained.

EPO - DG 1
- 5. 04. 2002
(64)

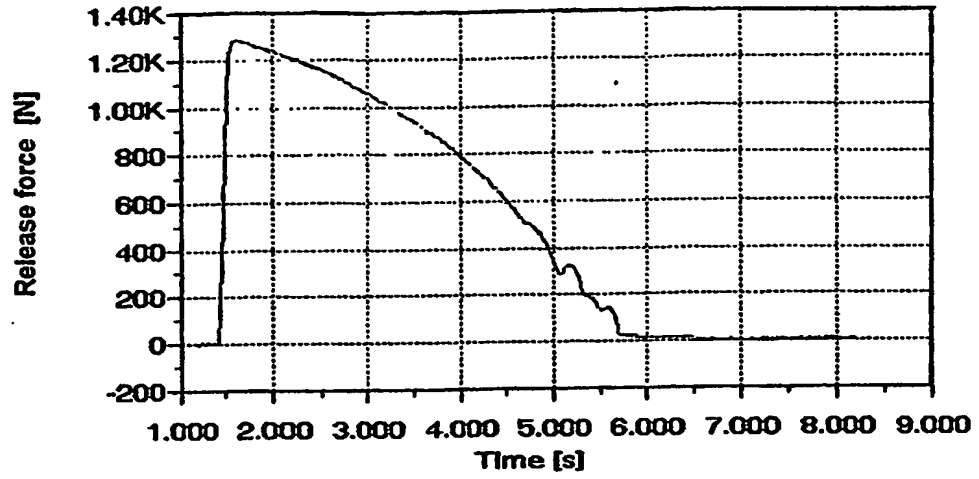


Fig. 1

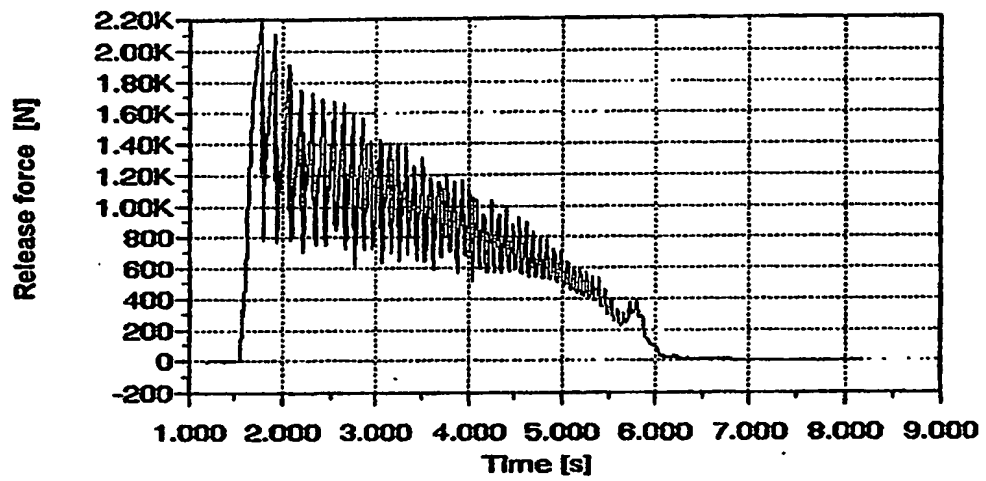


Fig. 2

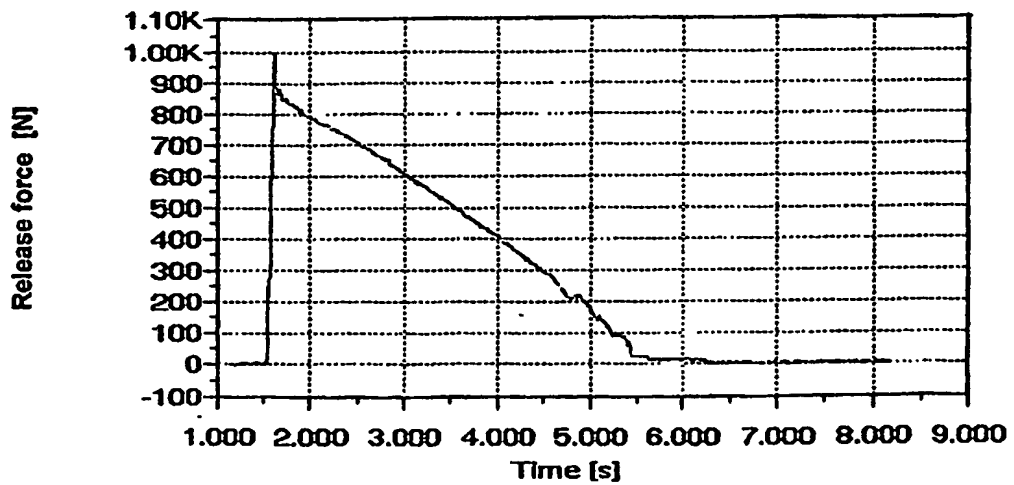


Fig. 3

EPO - DG 1
- 5. 04. 2002
(54)